

SPECIFICATION

Customer: _____

Customer's Model No.: _____

Model No.: **LIBRA L-7083i** Area Imager Barcode Scanner _____

Date: _____

Sample Serial No.: _____

Spec. Version & Revision Date: **Rev V00 2018.09.14**

Received/Approved by

SCANTECH ID[®]
CHAMPTEK Group

Web: <http://scantech-id.com>
E-mail: sales@scantech-id.com

SCANTECH ID
Heliumweg 34a 3812 RE Amersfoort,
The Netherlands

TEL: +31 (0) 33 4698400
FAX: +31 (0) 33 4650615

Revision History

Version	Date	Context
V00	2018.09.14	Released

TABLE OF CONTENTS

A. General Description	4
B. Physical Characteristics	5
C. Connecting.....	6
D. Powering.....	6
E. Electrical Characteristics.....	7
F. Performance	7
G. Environmental.....	8
H. Reading Range.....	8
I. Readable Symbologies	9
J. Reliability	10

A. General Description

The LIBRA L-7083i is a high performance, omni-directional area imager bar code scanner. It uses digital imaging technology to provide intuitive and fast reading of 1D and 2D bar codes as well as supporting more advanced features like image capture deactivation. It is designed for various OEM solutions, on-counter reading options.

It supports up to 180mm reading depth of 1D and 2D barcode, its scan rate is up to 60 images per second in 1D/2D area mode. Based on CMOS technology for optimal image sensitivity and dynamic range, the L-7083i features scanning speeds faster than traditional 2D imagers.

LIBRA L-7083i is a high performance area imager scanner, provides customers with the most cost-effective solution in the market and perfectly suitable and definitely the best choice for any retail and logistic environment.




B. Physical Characteristics

Weight	
Body weight	Approx.378g
RS232 Cable weight	Approx.123g
USB Cable weight	Approx. 67g
Material	ABS Plastic
Connector	RJ 48C 10 Pin
Dimension(WxDxH)	94 x 97.71 x 161.51 mm
Color Available	Black/Gray

Body Dimension

Unit: mm

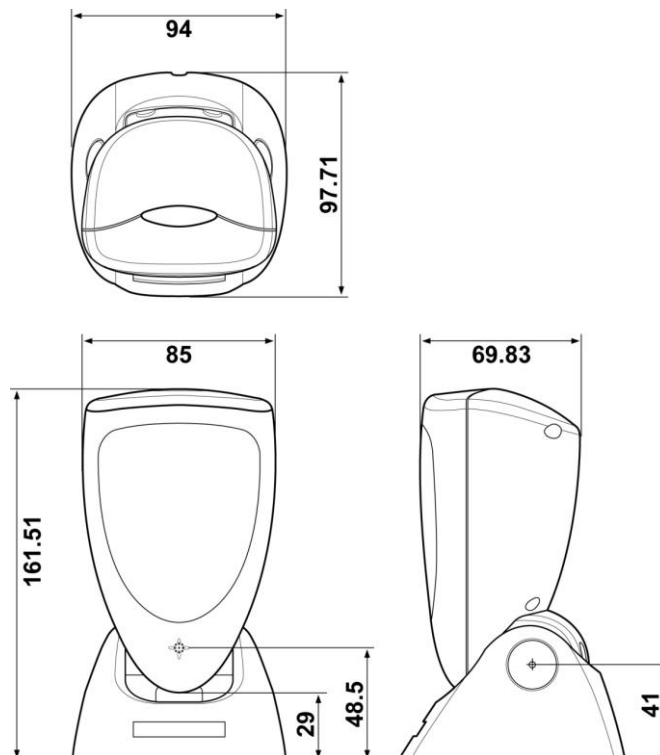





C. Connecting

Interface Selection

LIBRA L-7083i allows you to connect your host system using two different interface cables, RS232 or USB.

On powering up, the scanner determines the type of the interface used and switches to the appropriate protocol.


Interface Cable	Connector type
RS232 (Product Number: 0114-SM01121)	Sub-D 9-pin
	
USB (Product Number: 0114-SM04121)	USB connector
	

D. Powering

L-7083i power is designed by USB+5V, do not need power supply once the interface is USB, but will request power supply for RS232 interface.

Power injector

RS232 cable has a power injector to connect an external power supply.

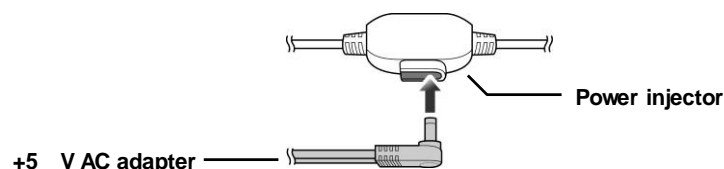


Cable	Power injector
RS232	√
USB	X

E. Electrical Characteristics (check)

Interface	RS232	USB
Supply Voltage	DC Adaptor +5V \pm 5%	USB Power
Stand-by (Typ.)	180 mA	180 mA
Operation (Typ.)	380 mA	380 mA

F. Performance

Light source	White Light LED
View of field	Horizontal – 40°, Vertical – 25°
Depth of field	Refer to “Reading Range” Session
Resolution	752 (H) x 480 (V) pixels 4.0 mil (Code 39), 10 mil (PDF417)
Scan speed	60 images per second
Pitch	\pm 60°(from front to back)
Skew	\pm 60°(from plane parallel to symbol(side- to-side))
Roll	360°
Interface	RS-232 or USB
Indicators	Beep and LED (Standby Orange, Good read Blue)

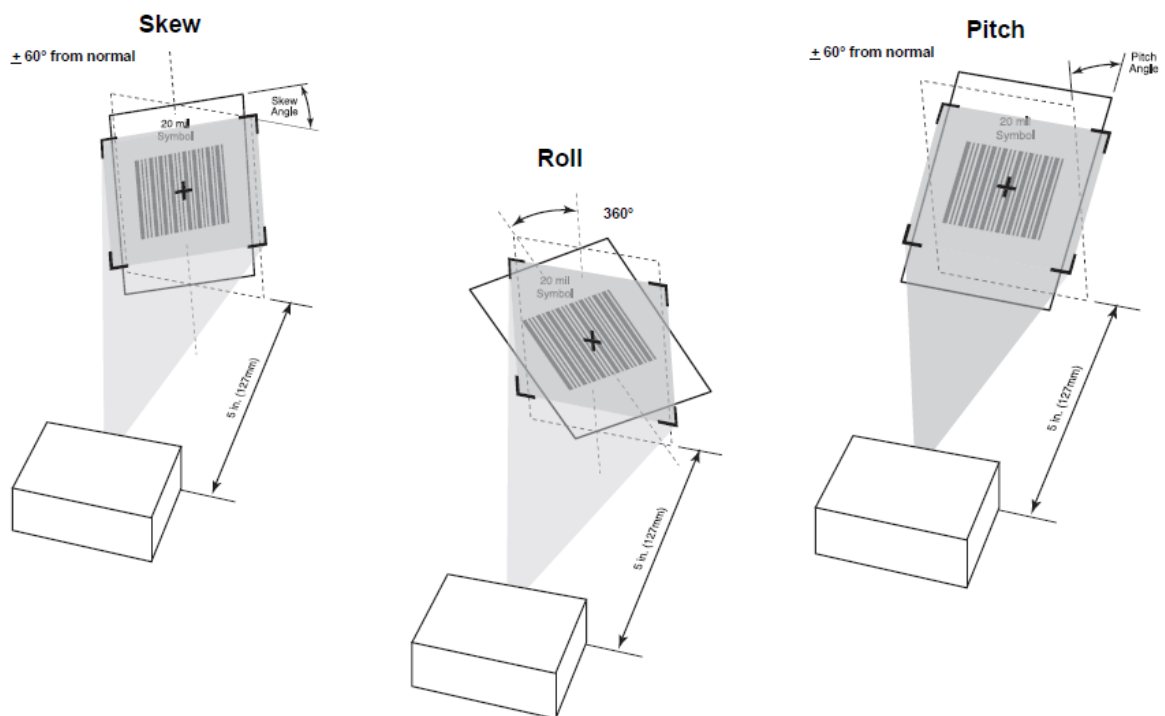

G. Environmental

Operating Temp.	0°C to 50°C(32°F to 122°F)
Storage Temp.	-20°C to 70°C(-4°F to 158°F)
Relative Humidity	20% to 95% (Non-condensing)
Ambient light	100,000 Lux Max. (Sunlight)
Sealing	Designed to IP42 water and dust protection

H. Reading Range

The following table summarizes the reading distance for the specified codes with both the wide area field and the high density field enabled and active for decoding.

Barcode	Depth of field
4mil Code39	0~ 50 mm
5mil Code39	0~70 mm
10mil Code39	10~140 mm
20mil Code39	20~200 mm
20mil QR Code	10~100 mm
10mil PDF417	0~90 mm
20mil PDF417	0~90 mm
20mil Data Matrix	0~90 mm

Note : The test is under 700~800 Lux ambient light,
Near distance is Field of View (FOV) limited by barcode's size.

I. Readable Symbologies

1D Symbologies	Readable	Default Enable
UPC-A	V	V
UPC-E	V	V
EAN-8/JAN-8	V	V
EAN-13/JAN-13	V	V
Code 39	V	V
Code 128	V	V
Codabar/NW7	V	V
Interleaved 25	V	V
Industrial 25	V	
Matrix 25	V	
Code 93	V	
China Post	V	
Code 11	V	
MSI/Plessey	V	
Telepen	V	
GS1 Databar Omni-directional	V	
GS1 Databar Limited	V	
GS1 Databar Expanded	V	

2D Symbologies	Readable	Default Enable
Aztec	V	
Data Matrix	V	V
PDF 417	V	V
Micro PDF 417	Optional	
QR Code	V	V
Micro QR Code	V	
GM Code	Optional	
Han Xin Code	Optional	

J. Reliability

Life Time

MTBF(Calculated) 50,000 hours

Temp. Test

High Temp. 70°C, 48 hours

Low Temp. -20°C, 48 hours

Cable Bending Test 25,000 times minimum (30 times/min @ 500g/90°)

Drop Resistance 39.38 inches(100cm) drop on concrete surface